

LAND CORNER RECORD

Index: T-17	Corner: 1/4 Corner between Sections 26 and 27	State of Indiana - Hoosier National Forest	
Section: 27	Township: 7N	Range: 1E	P.M.: 2nd
Coordinate:	Lat./N: 1371781.678	Long./E: 3150459.056	County: Monroe
			Datum: NAD83 IN West Zone, US Survey Feet


CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:	Monument Photograph:
10/19/1982	Ken Anderson L.S. #80040545	A stamped 3" aluminum monument set	USDA Forest Service Bedford, IN	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	T. Poplar	4"	S00°E	8.30'
	T. Poplar	5"	N18°W	13.70'
	B. Cherry	2"	N57°W	6.70'
Record evidence of prior survey:				
2.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
4/9/2009	Kevin Enright Monroe County Surveyor	A stamped 3" aluminum monument was found	Monroe County Surveyor's Office Bk. 41, Pg. 76	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	Tulip Poplar	8"	N70°E	13.30'
	Tulip Poplar	9"	N11°W	13.49'
	Tulip Poplar	7"	S02°W	8.08'
Record evidence of prior survey:	A metal fence post with a "SURVEY" sign is S02°W - 2.22'.			

ACCESSORIES: Bearing and distance from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Tulip Poplar** **	10"	N75°E	13.85'
	Pignut Hickory**	23"	S23°E	28.86'
	Tulip Poplar**	11"	N73°W	15.56'
	T-Post	N/A	S00°E	2.50'
** = no paint * = old blaze at base of tree				
Monument Found or Set:	A 3" aluminum monument stamped "T7N R1E 1/4 S.27 S.26 1982" found 0.5' above grade.			


MONUMENT SKETCH



NARRATIVE REFERENCE:

Monument is a 3" aluminum monument stamped "T7N R1E 1/4 S.27 S.26 1982" found 0.5' above grade, a carsonite post is located 2.0' north of the monument, located +/- 200' southeast of a large Pine stand, a mature tree line to the east along what looks like an old road bed, on the western crest of a north-south running ridge, a stand of 6"-10" Poplar trees is to the northeast.

SECTION DIAGRAM



PERPETUATION RECORD:

The record monument was found undisturbed and maintained by remarking one existing bearing tree and establishing two new bearing trees. One existing bearing tree was recovered from a Monument Record by Kevin Enright, dated 4/9/2009.

Two new bearing trees were marked with a blaze, scribed B.T., bearing tree sign and mag nail.

Referenced on BRCJ survey recorded as InstNo.2018007752

Accepted by the Monroe County Surveyor Review Board on August 6, 2019.

Section: 27 T7N R1E

Prepared By: BRCJ


(Project#3-0822)

Date: 5/2018

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 26 Township: 7 North Range: 1 East Corner ID: Polk Q-19

Monument Description & Remarks: 3" Aluminum cap, "T7N R1E, 1/4, S.27/S.26, 1982".
Survey Sign 4.5ft above ground at pt. B
References On File:

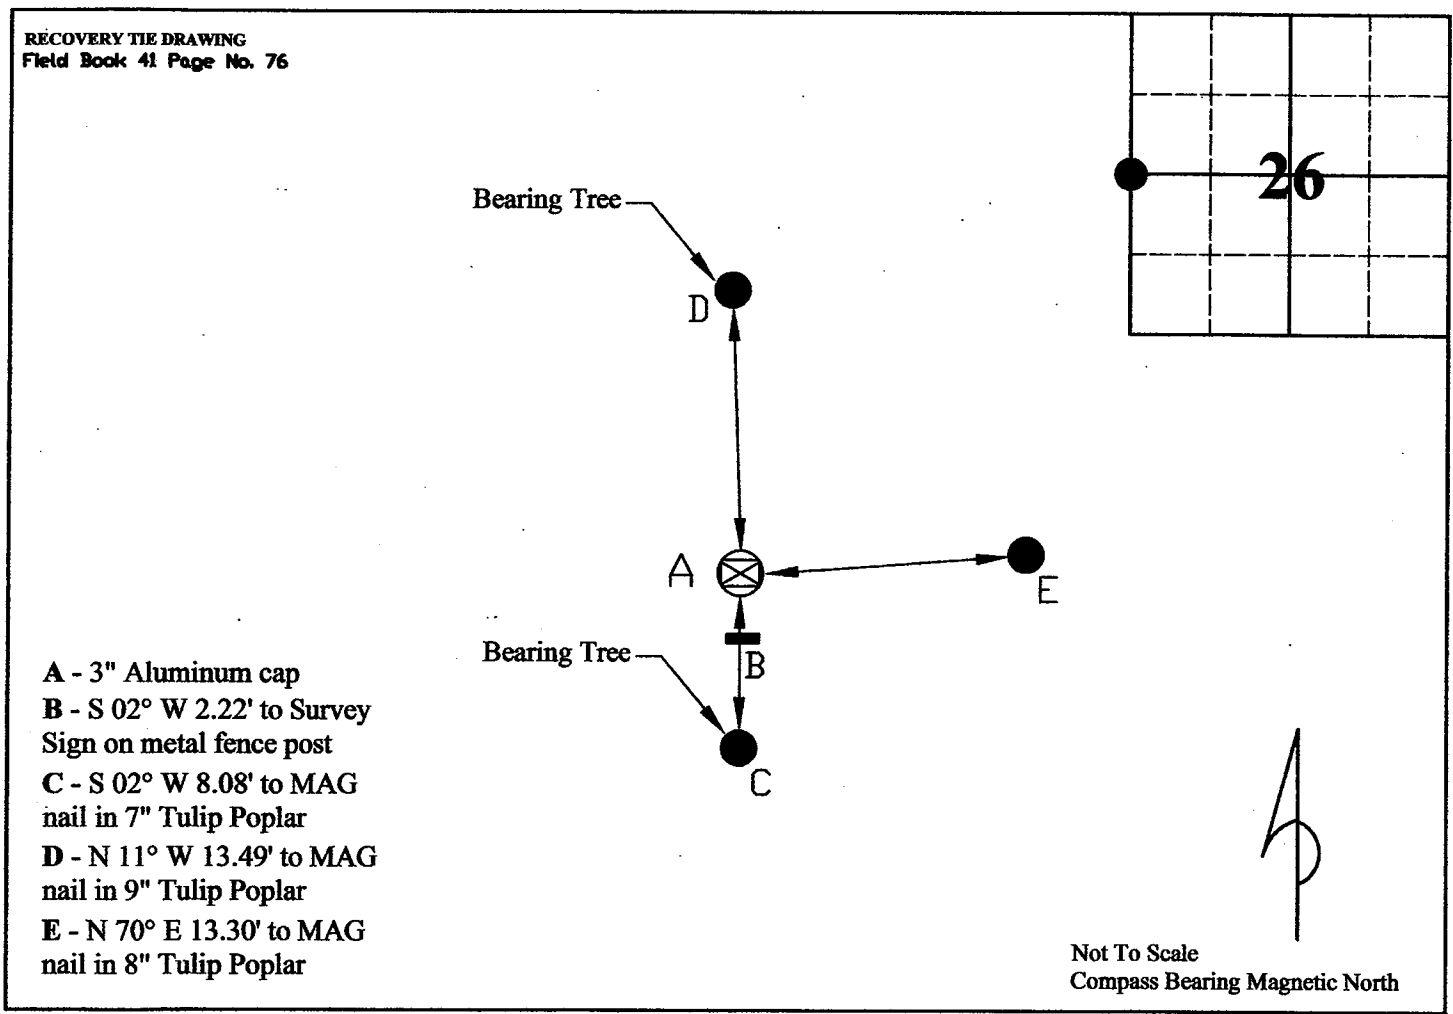

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 30th day of October, 2008.

Administered by the Monroe County Surveyor Review Board
Date: 4-9-2009



Index No. T-17
(Alphabetical-Numerical)

LAND CORNER RECORD
(RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67)
GPO 806-924

T. 7N R. 1E Mer. N.F. Hoosier County Monroe State Ind
14 Section Corner common to sections 26, 27, and

EXISTING SURVEYS	
Original Government Survey Year surveyed <u>1814</u> Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)	Original Evidence Found Year of search <u>1973</u> By <u>K. Weston</u> Monument found <u>No</u>
Bearing Trees Species <u>W. Oak</u> <u>Beech</u> Diameter <u>18"</u> <u>8"</u> Bearing <u>N 54 W</u> <u>S 55 E</u> Distance <u>51 Ks</u> <u>241 Ks</u>	Original Bearing Trees Found Species _____ Diameter _____ Bearing <u>None</u> Distance _____
Subsequent Corner Restoration Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ (Original, concrete post, iron rod, etc.)	Evidence of Subsequent Corner Restoration Found Year of search _____ By _____
Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____

Sketch ○ Corner ■ F.S. Land	Relation of Evidence to Record Features Along Section Lines Section line to sections _____ Object _____ Record distance _____ Measured distance _____
	Other Evidence Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any. <u>Found fence from N-E near area of corner</u>
At time of search: 1. Did you have the record description? Yes ☒ No _____ 2. How was search area located? Pacing, chaining, photos, maps, etc. _____ 3. Man hours spent in search <u>2 hr.</u> 4. Do you think additional search might recover evidence? Yes _____ No ☒ 5. Signature <u>K. Weston</u>	Perpetuation Record Monument and accessories established. Include brief description of area. _____ Certified corner restoration certificate prepared: Yes _____ No _____ Filed in county records at _____ Date _____ County Document No. _____ Identified on aerial photo No. _____ Which is filed at _____